

2W Coaxial Termination


Application

- Wireless communication system.
- Radar and satellite systems.
- Testing and measuring equipment.
- Other special applications: harmonic suppression, electronic countermeasures, etc.

RF Characteristics


Part Number	Frequency range	Power	VSWR Max	Connector Type	Impedance
5o21203NJ	DC-3GHz	2W	1.15	N-J	50 Ω
5o21206NJ	DC-6GHz	2W	1.25	N-J	50 Ω

Overall dimensions (mm)

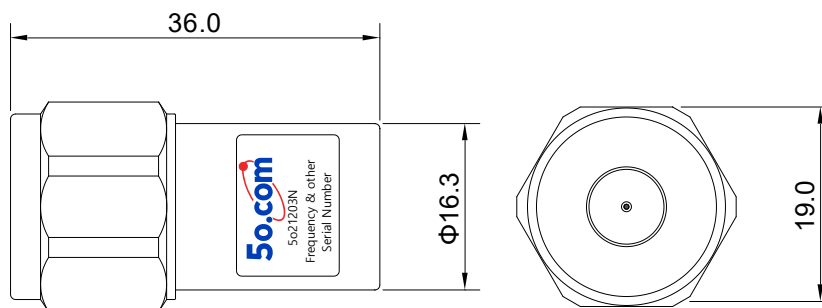

Tolerances: $\pm 2\%$ unless otherwise stated.

Power Derating Diagram

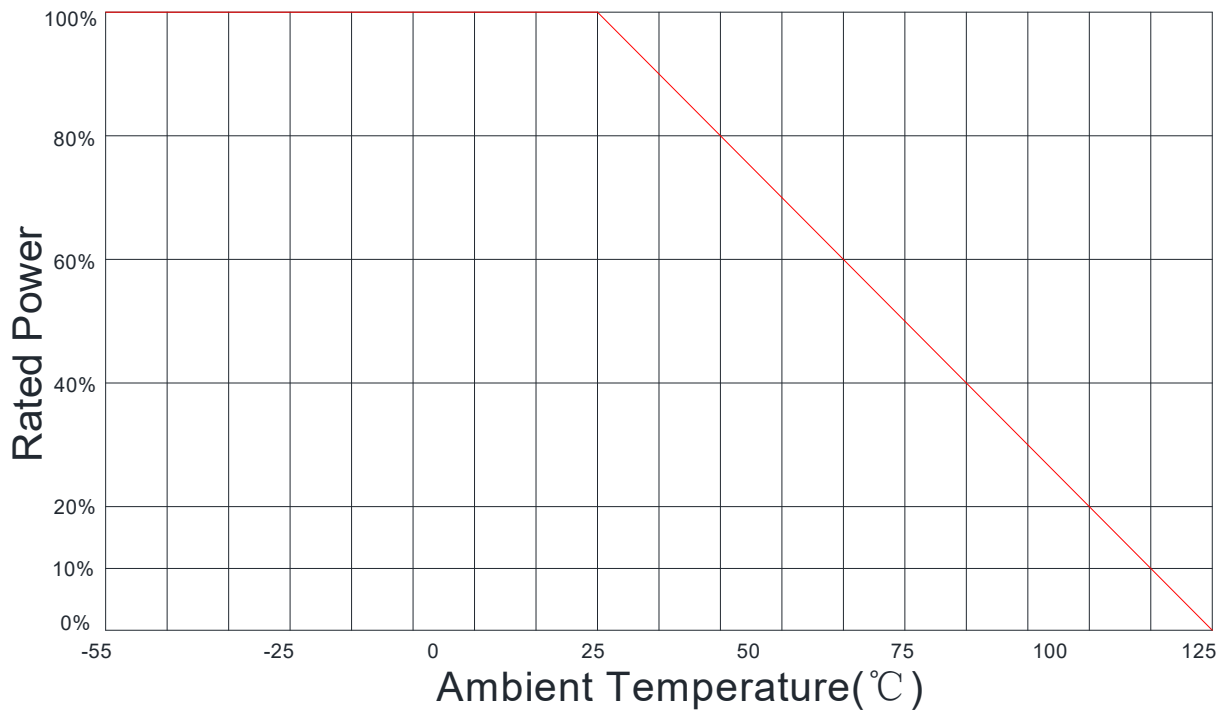

Notes

- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ Custom design is available upon request.
- ◆ For products with a power of over 50W, pay attention to the direction during use and strictly avoid reverse connection.
- ◆ It supports a one-year standard warranty.