

WR284 (BJ32) Waveguide to Coaxial Adapter

Application

- Ø Testing and measuring equipment.
- Ø Radar and communication systems.
- Ø Satellite and wireless communication.
- Ø Compact wiring scenario.
- Ø It supports a one-year standard warranty.



RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR284026395NK	2.6 ~ 3.95	0.15	1.15	WR284 (BJ32)	N-K
5o60WR284026395SK	2.6 ~ 3.95	0.15	1.15	WR284 (BJ32)	SMA-K
5o60WR284026395DK	2.6 ~ 3.95	0.15	1.15	WR284 (BJ32)	7/16-K

Basic Specifications

Power(W)	100	Impedance	50 Ω
Peak Power (KW)	3	Operating Temp	-55 ~ +85°C
Connector Type (Waveguide)	WR284 (BJ32)	Storage temperature	-55~+125°C

Overall dimensions(mm)

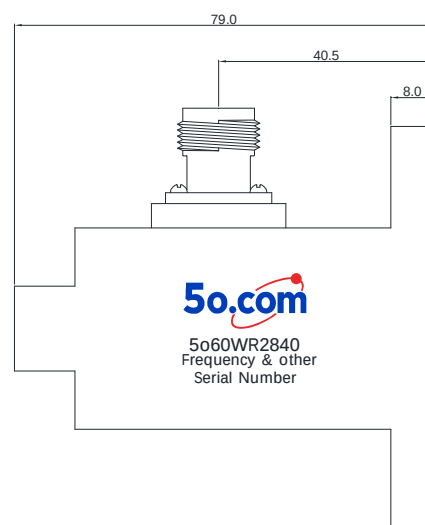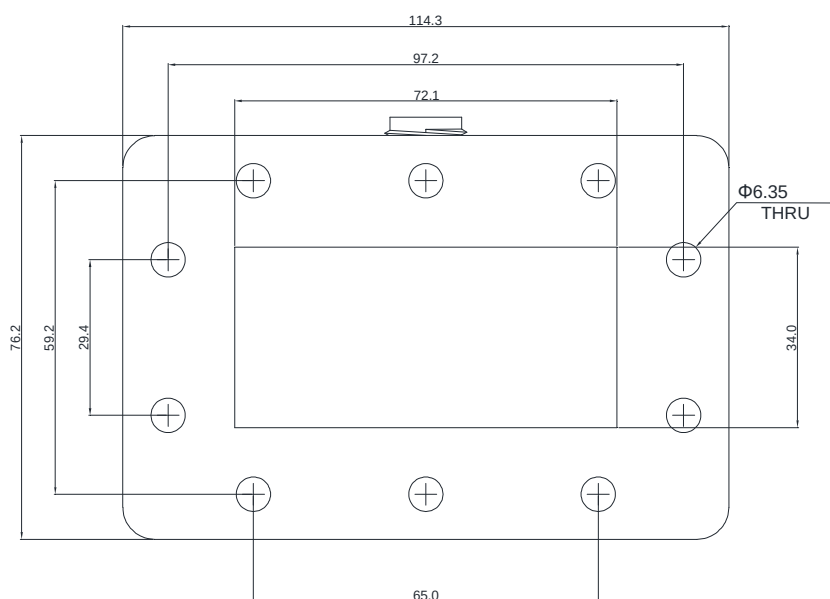

Tolerances: $\pm 2\%$ unless otherwise stated.